


cement with style





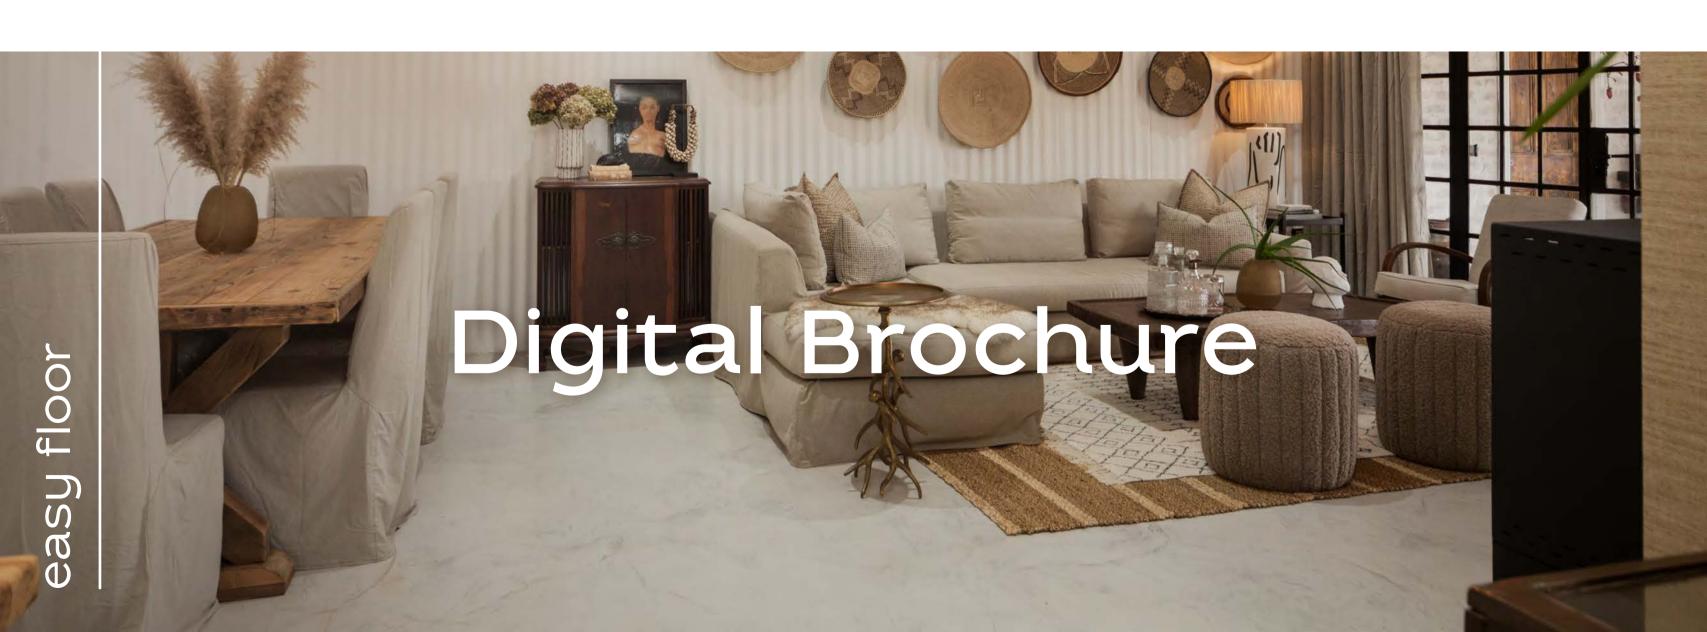


Easy Floor

Easy floor is a thin film trowel on floor application that is easy to apply and can adhere to most surfaces if prepared correctly.

Easy floor gives you a wonderful mottled finish resembling marble and leaves you with a durable easy to live with finish.

Easy floor is suitable for domestic and light commercial venues.



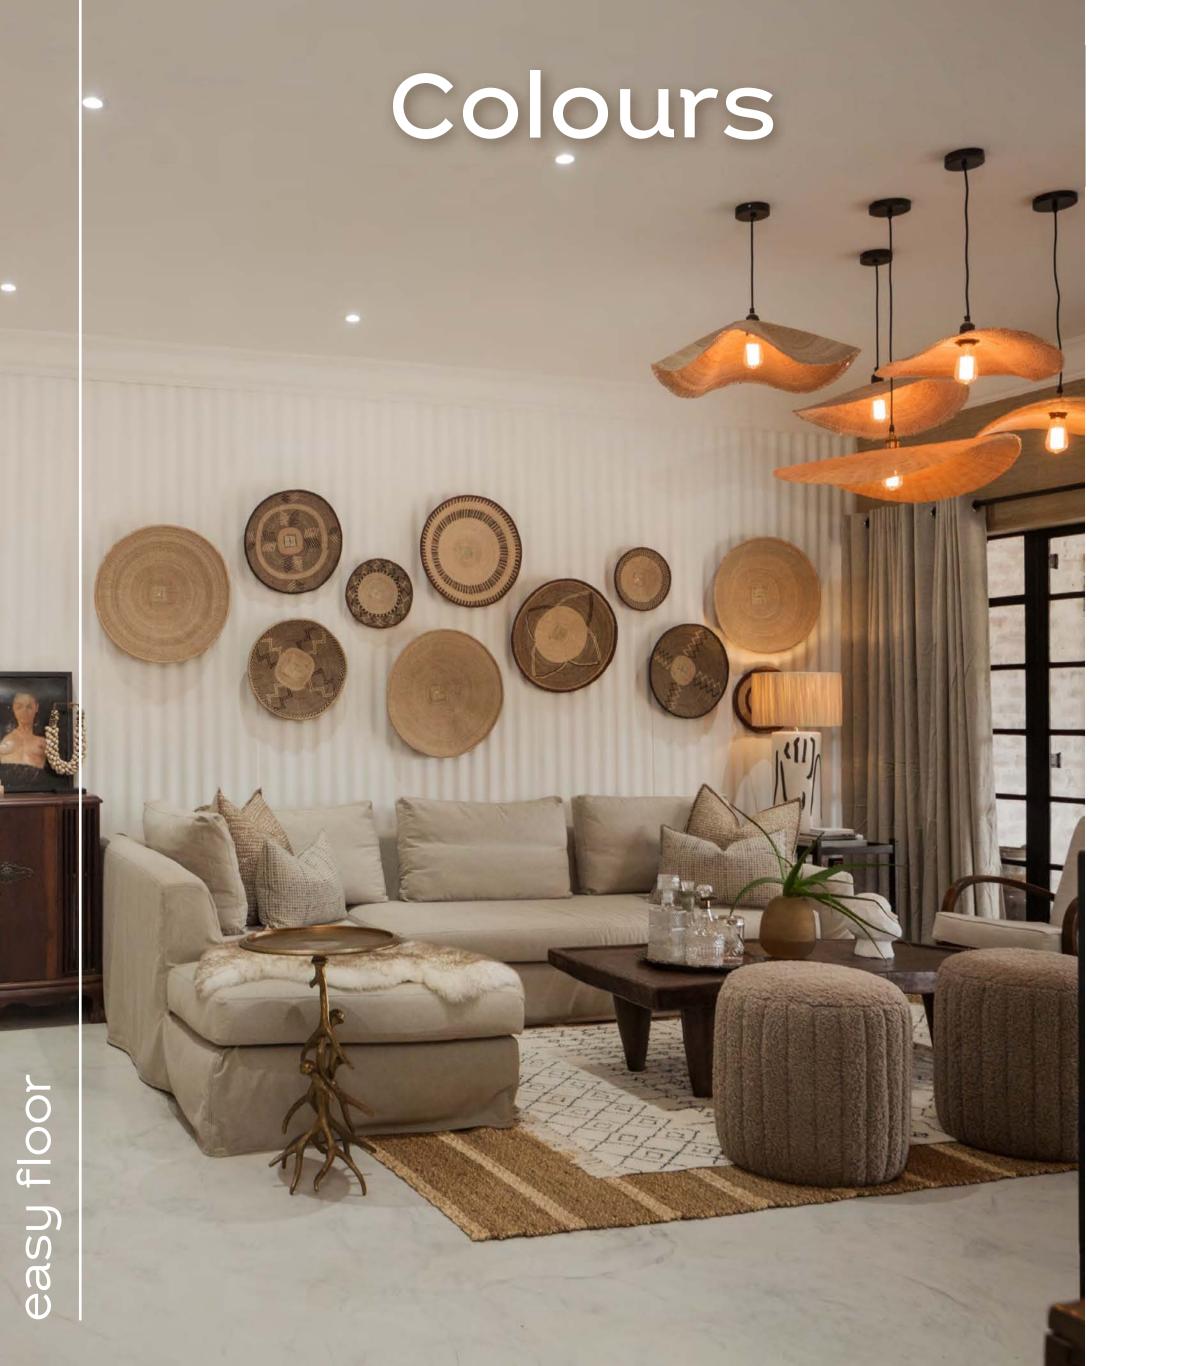



Bleached Linen



Head Over Heels



Off Shutter



Steamed Milk



Cracked Clay




Wet Cement




Coastal Plain



Rain Queen

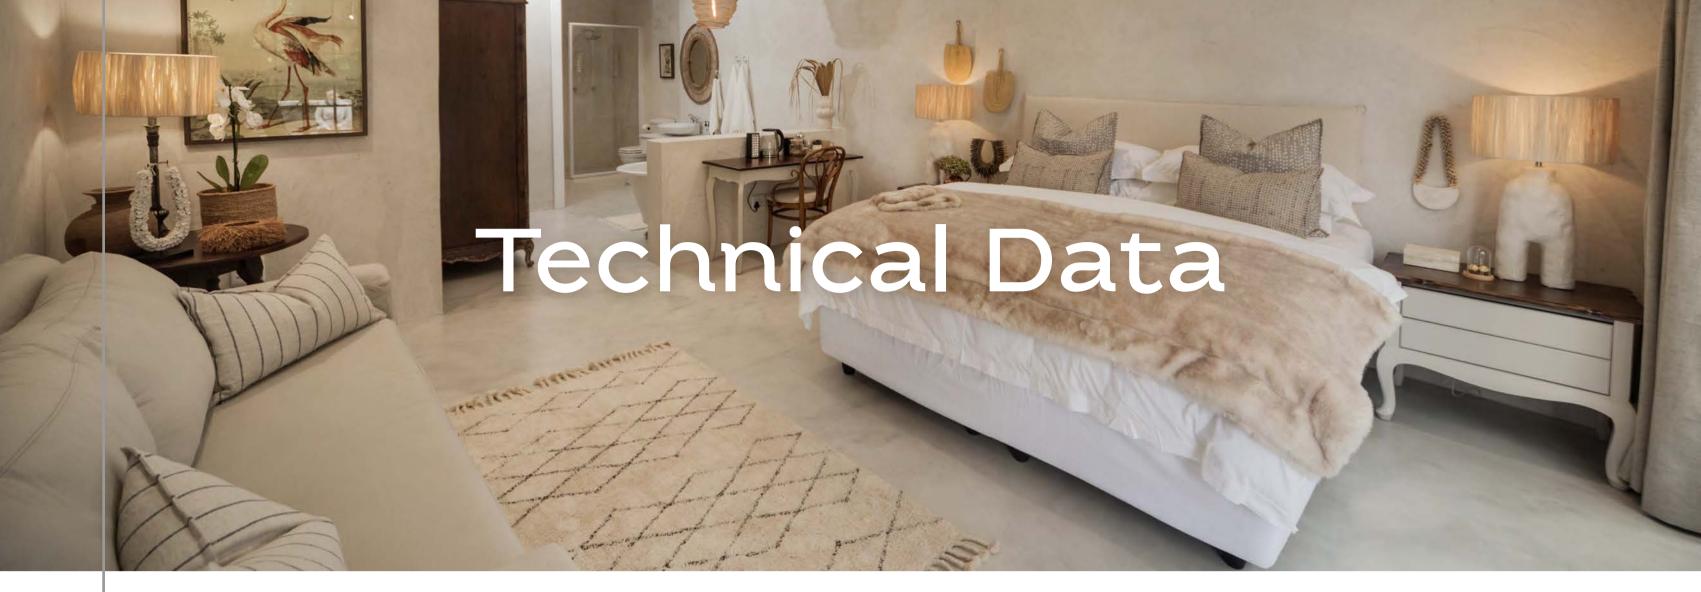

Product	Easy Floor
Туре	Modified cement coating
Application tools	Trowel
Protective Gear	Gloves and masks
Final thickness – 2 coats	1.4 – 1.8mm
Coverage	Approx. 30 – 35m² per kit surface dependant
Kit	1 x 12.5kg bag and 1 x 5L binder
Colours	8 Colours
Ambient Temperature	6 – 25 °C
Slab Temperature	6 – 25 °C
Pot Life	4 – 6 Hours
Work time once mixed	4 – 6 Hours
Initial set once applied	2 Hours (weather dependant)
2nd coat application	2 – 3 Hours after initial set
Care after final application	Clean Socks to be worn prior to sealing
Curing	After initial coat allow minimum 48 hours prior to sealing
Storage	In a cool dry area on a wood pallet on⊠ the □floor

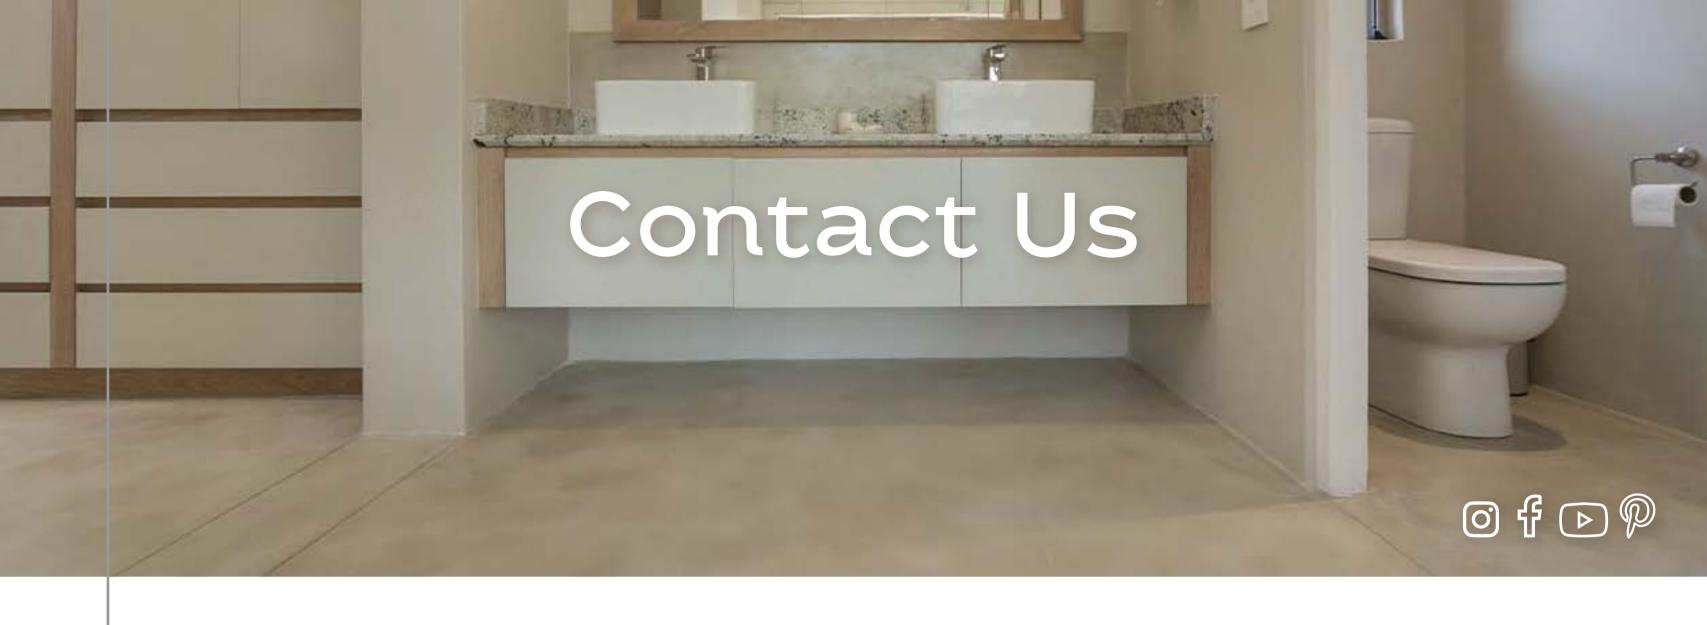

Head Office

T: +27 (O) 81 329 2773

A: 1 Campies Glen,

Groenfontein Farm,

Modjadjiskloof

0835

E: info@mixxcement.co.za

SA Sales & Distribution

T: +27 (O) 12 942 8619

A: Shop 8,

Mooikloof Village Centre,

C/O Garsfontein & Jolify

Mooikloof

Pretoria East

0105

E: sales@mixxcement.co.za

Sales & Distribution

T: +230 5919 1474

A: Spaces & Places

Endemika Business Park

Petit Raffray

Mauritius

E: mixx.mauritius@gmail.com







